

Ozone analyzer

Elektravägen 53
SE-126 30 Hägersten, Sweden
+46 10 252 30 00
www.mellifiq.com

Cabinet version of high concentration ozone gas analyzer BMT 965 C



The OZONE ANALYZER BMT 965 C is the wall-mount version of the standard BMT 965 ST for application in a hostile environment. It is housed in a splash-proof IP 65 (NEMA 4X) aluminum cabinet, and is equipped with everything needed for fully automatic stand-alone operation.

The instrument comes with a Sample Gas Filter (two-stage particle filter), throttle valve, flow meter, Purge Unit (solenoid valve and air pump, for fully automatic zeroing), and a Catalyzing Cartridge.

The two-stage particle filter is a stainless steel housing containing two different filter inserts: one pre-filter (OD 25 mm, 1 mm thick) and one ultra fine main filter (OD 25 mm, 6 mm thick). Both filter inserts are made of porous PTFE.

An eight gigabyte non-volatile log memory is included, providing virtually unlimited storage capacity for concentration and error logs. If connected to a PC, the instrument acts as an external USB drive, from which concentration and error logs can be downloaded. Logs can also be copied and firmware can be upgraded without an external computer just by connecting a USB flash drive.

Complete control of all operating parameters is provided with the Windows software BMT 965 Link.

Applications

- Ozone measurement in hostile environment
- Monitoring of ozone generator output
- Monitoring of residual ozone after a process
- Potable water & waste water treatment
- Industrial ozone processes
- Ballast water treatment

Superior stability of the photometer is achieved by use of a true dual beam optical system with an extremely long-life mercury lamp. MTBF of the instrument, including the lamp, is in excess of 65,000 hours. Excluding the lamp it is 120,000 hours.



© Mellifiq

ozonetech.
a MELLIFIQ brand

Ozone analyzer

The OZONE ANALYZER BMT 965 C is housed in a powder-coated aluminum cabinet. The space needed (door open, sample gas tubing and cables connected) is approx. 480 x 240 x 420 mm (W x H x D). The cabinet can be wall mounted using the four brackets provided at the rear (four mounting holes 6 mm ID, spaced 240 x 225 mm, W x H).

The ozone sample gas is connected to the Sample Gas Filter (two-stage particle filter) provided outside of the cabinet (see sketch above). We recommend to use transparent FEP sample gas tubing 3x5 mm (or 1/8"x3/16" respectively). The standard inlet fittings thus are for 3x5 mm flexible tubing. But different other fittings are available on request: for 4x6 mm flexible tubing, or Swagelok fittings 1/8" or 6 mm or 1/4".

Additional BMT Products (for details, refer to the appropriate data sheets):

- BMT 965 BT (Bench Top) for stand-alone applications on the bench, or in the field
- BMT 965 AQ for ozone measurement in DI (de-ionized) water
- BMT 965 AQ/HF for ozone in DI water with HF
- BMT 932 Ozone Monitor for TLV monitoring in ambient air (1, 3 & 6 channels)

A broad spectrum of field-proven accessories - from simple fittings and tubing up to a thermoelectric sample gas dryer - helps the user with the application and installation of the OZONE ANALYZER BMT 965 C.

Please ask for our assistance!

Features

- Dual beam UV photometer
- Long-life mercury lamp
- Warranty 3 years, 5 years on the UV lamp
- High accuracy, error less than 0.5%
- Pressure and temperature compensated
- Ranges from 10 to 600 g/Nm³
- Two-stage particle filter, integrated
- Built-in Purge Unit and timer for automatic zeroing
- Failure warnings include: lamp low, cuvette dirty, overrange, summary error
- Key functions programmable via the front panel, or a Windows
- Display in g/Nm³, %wt/wt, or ppm_v
- High and low limit alarms
- 4-20 mA and 0-10 V isolated outputs
- 8 GB non-volatile log memory (binary and Excel CSV)
- USB On-The-Go, Firmware upgrades in the field

Elektravägen 53
SE-126 30 Hägersten, Sweden
+46 10 252 30 00
www.mellifiq.com



© Mellifiq

ozonetech.
a MELLIFIQ brand

Ozone analyzer

Technical specification

| | |
|---------------------------------|--|
| Measurement principle | Dual-beam UV photometer (254 nm) no moving parts |
| MTBF | Instrument incl. UV lamp 65,000 h, excl. UV lamp 120,000 h |
| UV lamp | Low pressure mercury lamp, long life design, burnt-in for 300 h |
| Display | 16 character alphanumeric backlit LCD |
| Concentration ranges | 50, 100, 200, 300, 400, 500, 600 g/Nm ³ , selectable units g/Nm ³ , %wt/wt and ppm _v |
| Optional ranges | 10, 20 g/Nm ³ , selectable units g/Nm ³ , %wt/wt and ppm _v |
| Accuracy | After zeroing the max. error is the sum: 0.4% of measurement + 0.1% of scale |
| Repeatability error | 0.2 % of measurement |
| Response time | 0.1 s (analog output), 0.3 s (display) |
| Zero drift | Typ. 0.2% of range per day, after warm-up, non-cumulative |
| Max. inlet pressure | 2.5 bar gauge |
| Max. outlet pressure | 1.15 bar abs |
| Ambient temperature | 0 - 55 °C (non-condensing) |
| Materials in contact with ozone | Quartz (cuvette windows), stainless steel (cuvette, fittings, cuvette spacer), FFPM (window seals), FEP (tubing) |
| Inlet gas ports | For 3x5 mm (1/8" x 3/16") tubing, opt. 4x6 mm PTFE or 1/8" or 1/4" or 6 mm Swagelok Built-in sample gas filter is standard |
| Outlet gas port | For 4x6 mm tubing |
| Recommended flow rate | 0.1 to 1 l/min typical |
| Pressure drop | Approx. 60 mbar at 0.5 l/min (throttle valve fully open) |
| Temperature compens. | Is standard |
| Pressure compensation | With built-in cuvette pressure transducer, units selectable: bar, psi, Torr, MPa |
| Signal outputs | Concentration 4 - 20 mA (isolated, active) concentration 0 - 10 V (isolated) |
| Concentration alarms | High Alarm, Low Alarm, latching, not latching |

Elektravägen 53
SE-126 30 Hägersten, Sweden
+46 10 252 30 00
www.mellifiq.com




© Mellifiq

ozonetech.
a MELLIFIQ brand

Ozone analyzer

Technical specification

| | |
|---------------------------|---|
| Concentration alarms | High Alarm, Low Alarm, latching, not latching |
| Control input | Set to zero (24 V, 8 mA, isolated) |
| Control outputs | Relay contacts, 28 V, 0.5 A, isolated: Lamp Low Warning Cuvette Dirty Warning High Alarm Low Alarm Purge Control |
| Error handling | Error Relay: 30 V, 0.5 A, summarizing instrument failures, Lamp Low Error, Lamp Off Error, Cuvette Dirty Error, Overrange, Overpressure |
| Early warnings | Lamp Low Warning, Cuvette Dirty Warning |
| Memory | 8 GB for error and concentration logs |
| USB | On-The-Go, Device/Host mode, Full speed |
| Serial interface (option) | RS-232, bidirectional, isolated, 2400 - 38400 Baud |
| Automatic zeroing | With internal purge pump and solenoid valve |
| Software | BMT 965 Link, instrument configuration and readout of Concentration, Event and Error Logs on a Windows PC |
| Power | Wide range input: 100 - 240 VAC, 35 VA |
| Dimensions (W x H x D) | 300 x 200 x 120 mm |
| Weight | 3.6 kg |
| Compliance | CE-marked (EMC & safety), cTUVus NRTL-listed, USCG 46 CFR 162.060-30 |

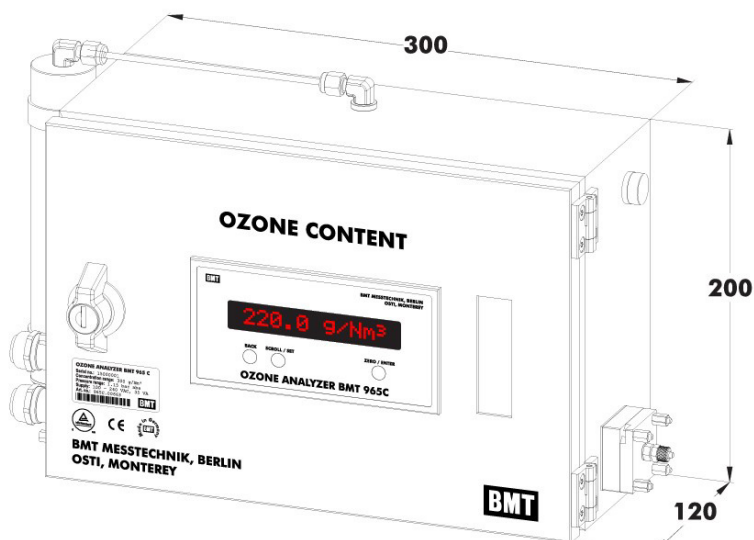

Dimensional outline

Elektravägen 53
SE-126 30 Hägersten, Sweden
+46 10 252 30 00
www.mellifiq.com